





Timken MANUFACTURING (THAILAND)CO.,LTD.

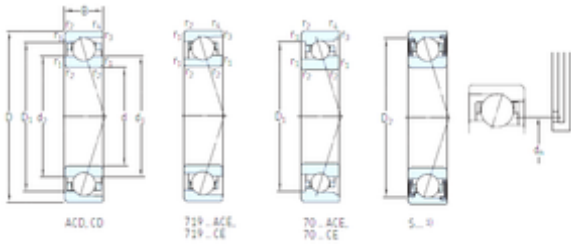

45 mm x 75 mm x 16 mm SKF S7009 ACD/P4A angular contact ball bearings

Bearing No. S7009 ACD/P4A

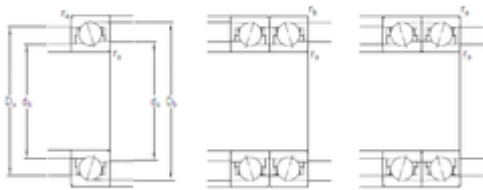

S7009 ACD/P4A Bearing 2D drawings and 3D CAD models

Size	45x75x16 mm
Bore Diameter	45 mm
Outer Diameter	75 mm
Width	16 mm
d	45 mm
D	75 mm
B	16 mm
C	16 mm
d1	54,2 mm
d2	54,2 mm
r1 min.	1 mm
r2 min.	1 mm
r3 min.	0,3 mm
r4 min.	0,3 mm
D1	65,8 mm
D2	68,3 mm
da min.	49,6 mm
Da max.	70,4 mm
db min	49,6 mm
ra max.	1 mm
rb max.	0,3 mm
dh	56,2 mm
Db max	73 mm
Weight	0,24 Kg
Basic dynamic load rating (C)	27,6 kN



Timken MANUFACTURING (THAILAND)CO.,LTD.

Basic static load rating (C ₀)	21,6 kN
(Grease) Lubrication Speed	17 000 r/min
(Oil) Lubrication Speed	26 000 r/min
Fatigue load limit (P _u)	0,9
d ₁	54.2 mm
d ₂	54.2 mm
D ₂	68.3 mm
r _{1,2} min.	1 mm
r _{3,4} min.	0.3 mm
a	22.1 mm
d _a min.	49.6 mm
d _a max.	53.7 mm
d _b min.	49.6 mm
d _b max.	53.7 mm
D _a max.	70.4 mm
D _b max.	73 mm
r _a max.	1 mm
r _b max.	0.3 mm
Basic dynamic load rating C	27.6 kN
Basic static load rating C ₀	21.6 kN
Fatigue load limit P _u	0.9 kN
Attainable speed for grease lubrication	17000 r/min
Ball diameter D _w	9.525 mm
Number of balls z	17
Preload class A G _A	170 N
Static axial stiffness, preload class A	132 N/ μ m
Preload class B G _B	340 N
Static axial stiffness, preload class B	173 N/ μ m
Preload class C G _C	680 N
Static axial stiffness, preload	229 N/ μ m



Timken MANUFACTURING (THAILAND)CO.,LTD.

class C	
Preload class D G_D	1360 N
Static axial stiffness, preload class D	309 N/ μ m
Calculation factor f	1.09
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.08
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.24 kg