




# Timken MANUFACTURING (THAILAND)CO.,LTD.

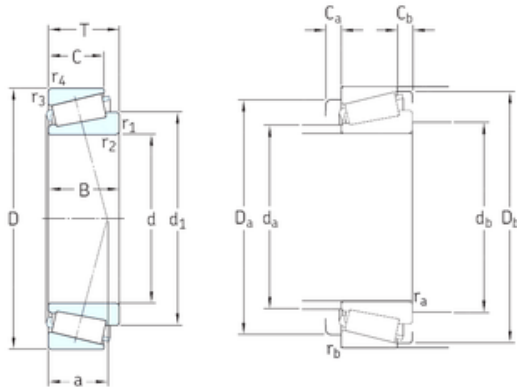

47,625 mm x 88,9 mm x 22,28 mm SKF  
369S/2/362A/2/Q tapered roller bearings

Bearing No. 369S/2/362A/2/Q

369S/2/362A/2/Q Bearing 2D drawings and 3D CAD models

|                |                       |
|----------------|-----------------------|
| Size           | 47.625x88.9x20.638 mm |
| Bore Diameter  | 47,625 mm             |
| Outer Diameter | 88,9 mm               |
| Width          | 20,638 mm             |
| d              | 47,625 mm             |
| D              | 88,9 mm               |
| T              | 20,638 mm             |
| B              | 22,28 mm              |
| C              | 16,56 mm              |
| a              | 16 mm                 |
| d1             | 66,2 mm               |
| r1 min.        | 2,3 mm                |
| r2 min.        | 2,3 mm                |
| r3 min.        | 1,3 mm                |
| r4 min.        | 1,3 mm                |
| Ca min.        | 3 mm                  |
| Cb min.        | 3 mm                  |
| da max         | 55 mm                 |
| Da min         | 76 mm                 |
| Da max.        | 82,5 mm               |
| db min         | 56,5 mm               |
| Db min.        | 80 mm                 |
| ra max.        | 2,3 mm                |
| rb max.        | 1,3 mm                |
| Weight         | 0,55 Kg               |
|                |                       |



## Timken MANUFACTURING (THAILAND)CO.,LTD.

|                               |            |
|-------------------------------|------------|
| Basic dynamic load rating (C) | 76,5 kN    |
| Basic static load rating (C0) | 91,5 kN    |
| Fatigue load limit (Pu)       | 10,4       |
| Reference speed               | 5600 r/min |
| Limiting speed                | 8000 r/min |
| Calculation factor (e)        | 0,31       |
| Calculation factor (Y)        | 1,9        |