




Timken MANUFACTURING (THAILAND)CO.,LTD.

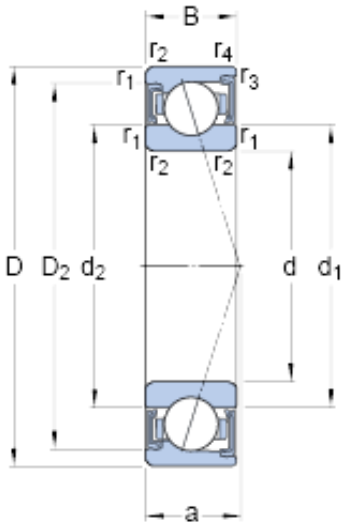

80 mm x 140 mm x 26 mm SKF S7216 ACD/P4A angular contact ball bearings

Bearing No. S7216 ACD/P4A

S7216 ACD/P4A Bearing 2D drawings and 3D CAD models

Size	140x80x26 mm
Bore Diameter	140 mm
Outer Diameter	80 mm
Width	26 mm
d	80 mm
D	140 mm
B	26 mm
d ₁	99.5 mm
d ₂	99.5 mm
D ₂	124.3 mm
r _{1,2} - min.	2 mm
r _{3,4} - min.	1 mm
a	38.8 mm
d _a - min.	91 mm
d _a - max.	98.5 mm
d _b - min.	91 mm
d _b - max.	98.5 mm
D _a - max.	129 mm
D _b - max.	134.4 mm
r _a - max.	2 mm
r _b - max.	1 mm
Basic dynamic load rating - C	81.9 kN
Basic static load rating - C ₀	72 kN
Fatigue load limit - P _u	2.9 kN



Timken MANUFACTURING (THAILAND)CO.,LTD.

Limiting speed for grease lubrication	8500 r/min
Ball - D_w	17.462 mm
Ball - z	17
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	520 N
Preload class B - G_B	1040 N
Preload class C - G_C	2080 N
Preload class D - G_D	4160 N
Calculation factor - f	1.09
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.01
Calculation factor - f_{2C}	1.02
Calculation factor - f_{2D}	1.05
Calculation factor - f_{HC}	1
Preload class A	257 N/micron
Preload class B	303 N/micron
Preload class C	401 N/micron
Preload class D	540 N/micron
d_1	99.5 mm
d_2	99.5 mm
D_2	124.3 mm



Timken MANUFACTURING (THAILAND)CO.,LTD.

$r_{1,2}$ min.	2 mm
$r_{3,4}$ min.	1 mm
d_a min.	91 mm
d_a max.	98.5 mm
d_b min.	91 mm
d_b max.	98.5 mm
D_a max.	129 mm
D_b max.	134.4 mm
r_a max.	2 mm
r_b max.	1 mm
Basic dynamic load rating C	81.9 kN
Basic static load rating C_0	72 kN
Fatigue load limit P_u	2.9 kN
Attainable speed for grease lubrication	8500 r/min
Ball diameter D_w	17.462 mm
Number of balls z	17
Preload class A G_A	520 N
Static axial stiffness, preload class A	257 N/ μ m
Preload class B G_B	1040 N
Static axial stiffness, preload class B	303 N/ μ m
Preload class C G_C	2080 N
Static axial stiffness, preload class C	401 N/ μ m
Preload class D G_D	4160 N
Static axial stiffness, preload class D	540 N/ μ m
Calculation factor f	1.09
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.01
Calculation factor f_{2C}	1.02



Timken MANUFACTURING (THAILAND)CO.,LTD.

Calculation factor f_{2D}	1.05
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	1.51 kg